



Travel pod assembly manual

Creative Care Ltd

Sandholme Sawmill, Key Sike Lane, Todmorden, Lancs. OL14 5RF

07585667248


Travel pod Mark 2 assembly instructions



(A) Empty the contents of the bags and sort the poles out into the three labelled groups TOP—BOTTOM and LEGS.

Roll out the fabric and place it upside down on the floor.

(B) Remove the foam from inside the transport bags and insert them into the pockets on the base.

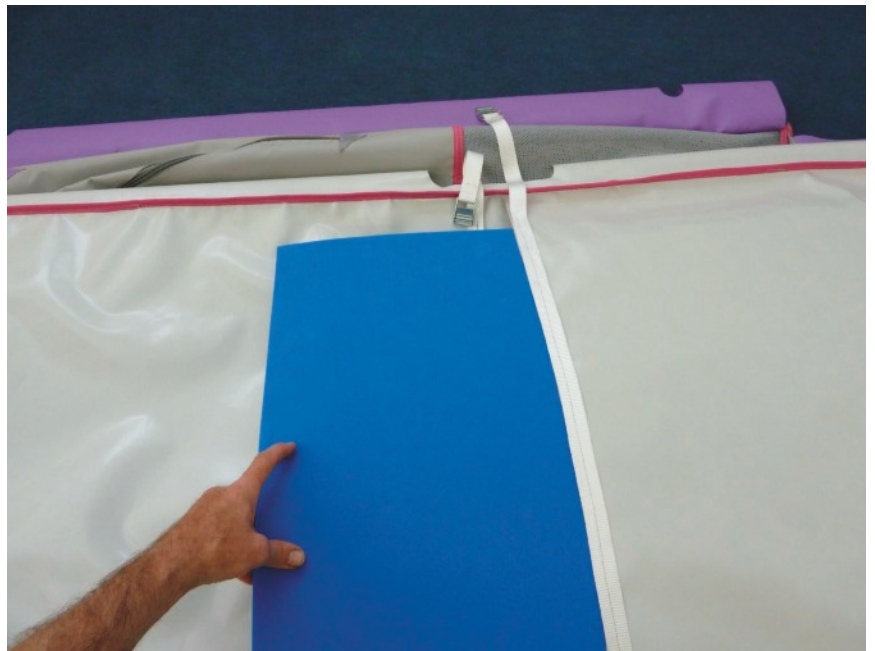

(C) Place the centre bar in the middle of the base on top of the webbing as shown.

(D) Select the four poles marked bottom that have a spring button at one end only. Slide them into the pole pockets with the button facing upwards as shown.



(E) Push them into the centre bar until they hit the end stop. The fabric will try to pull them out of alignment so you may need to straighten them and give a twist. **Until your pod has been used a few times** this task can be a bit difficult , using the end bars in (F) below pushed onto the ends can help to align them until the fabric relaxes .

(F) Take the two remaining 'bottom' poles that have a button at each end, select the plastic fittings that have a Velcro strap attached and fit them to both ends of the pole as illustrated. Make sure the buttons click into position.






(G) Pull the long poles apart and locate them into the plastic fittings and push the end bar up to the buttons. The buttons can now be depressed and slid all the way in, you may need to twist the pole to ensure the spring button clicks into position.

Repeat this operation at the opposite end.

(H) Now do up the zip pole pockets. You may need to slide the fabric towards you to make this operation easier. If the zip still feels too tight to operate check that the four poles are correctly inserted into the centre bar. Ref section (E)

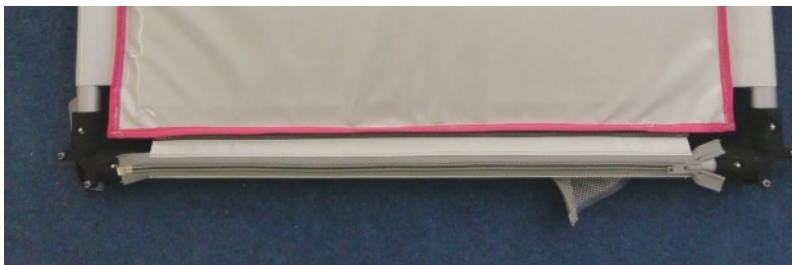

Both ends should now look like this.

(I) Finally make sure that the webbing is threaded around the centre bar as illustrated then fit it through the tension buckle and apply tension.





(J) Next turn the whole frame and fabric over so it is the right way up.

Now select all the poles marked 'top'.

(K) Gather the poles marked (1) and (2) and assemble them into two long poles as shown making sure the buttons click into position.



(L) Push the long poles and the short poles into the pole pockets so that the wing nuts protrude from the holes and the spring buttons face upwards. If you seem to have two left hand poles and no right hand pole hold the pole like a propeller and turn it through 180 degrees and it will turn into a right hand pole by magic!

(M) Now gather the 3 way plastic fittings and assemble them onto the poles as illustrated.



(N) Both ends of the top frame should now look like this, with all wing nuts facing outwards and all the spring buttons correctly seated into the plastic fittings.



(O) Gather the legs and assemble the two half's together on all four legs. Take two of the leg assemblies, raise the top frame and insert the legs into the plastic fittings as shown.

Now raise the other end of the top frame and insert the other two leg assemblies.

(P) Swing out the stays from the legs and locate them onto the shaft of the bolt behind the wing nut. You may need to move the frame about to locate them. Once they are located on the shaft tighten the wing nut and repeat for all the other stays.



(Q) On the bottom frame take the Velcro strap and pass it around the leg then behind the bolt before securing it back onto the Velcro.

Tip: moving the leg out of way makes it a lot easier to get the strap behind the bolt.


(R) Finally pass the netting corners around the legs and zip them up. Your Safe&Sound Travel pod is now ready for use.

With practice your pod should take under 10 min to erect.

Travel Pod assembly video:- (Mark 1)

www.youtube.com/watch?v=xRpYfljOW24


Travel Pod (Mark 2) assembly video coming soon.

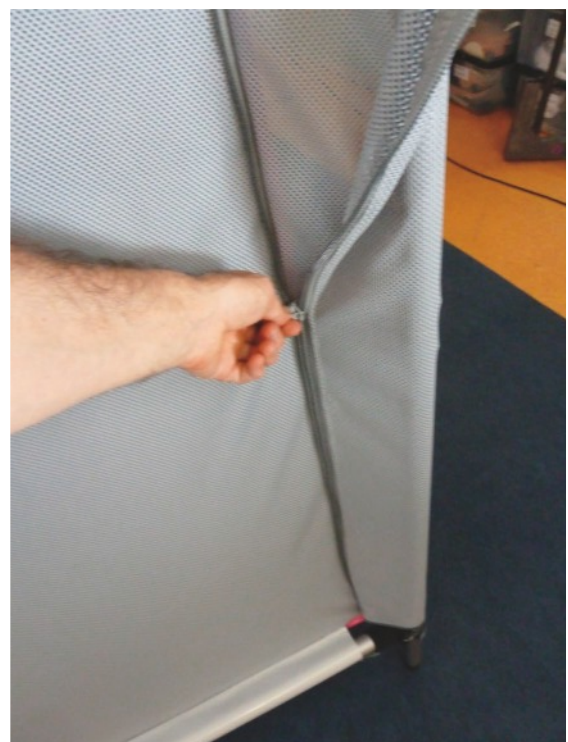

Fitting the stability kit

Arrange the two stability bars at each end of the pod as shown.

Hint:- If the inner tubes have come out and got mixed up they are handed left and right. You will need to pair them up to ensure the black plastic fittings are angled in thus / \ before trying to fit them to the legs.

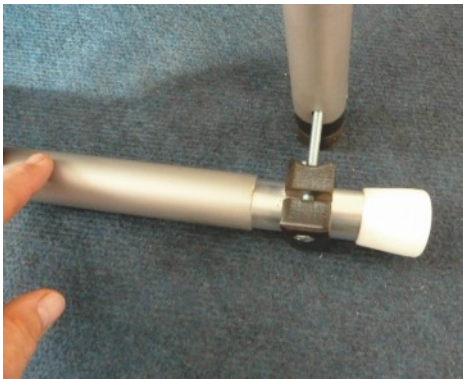

Pass the bolt through the legs

Assemble the wing nut onto the back.



Slide the bar out to increase stability. NOTE: always leave at least 2" inside the outer tube for safety.

Do not overtighten the wing nut as damage to the plastic fitting may result.

Video instructions for assembly & repacking are available on our

Website www.creativecareltd.com

Or on our YouTube channel

www.youtube.com/channel/UCk3c2US1hJIVutcTHDogWAQ